

Shrink Wrappers-Tunnel

Low production rate cardboard sheet shrink wrapper (8-10 p/min):
Model ZEA/90 PC.



OPERATION

The product is received at a 90° angle on the conveyor entrance. The number of lanes on the machine will depend on the line product and format requirements. A pneumatic brake system is used to separate the products. The suction pad and chain assembly positions the cardboard sheets, so that the pushing cylinder displaces the bundle and cardboard sheet to the welding zone. The product on the cardboard sheet wrapped with film is shrink wrapped in the shrink wrapping tunnel.

TECHNICAL FEATURES

Shrink wraps with polyethylene film.

Electronic temperature control in the shrink wrap and welding tunnel.

Manual controls and fully automatic operation.

Double pneumatic brake used to bundle products.

Touch-screen used to adjust or add new formats.

Top quality materials: OMRON automation system, FESTO pneumatic system, TELEMECANIQUE electrical devices.

PRODUCTS AND MARKET SECTORS


Food sector: mainly works with cylindrical products, such as cans, bottles or jars: canned vegetables, canned meat or canned fish, legumes, pickled foods, mushrooms, olives, etc.

Non-food: paint, aerosols, chemist's.



Shrink Wrappers-Tunnel

Low production rate cardboard sheet shrink wrapper (8-10 p/min):
Model ZEA/90 PC.

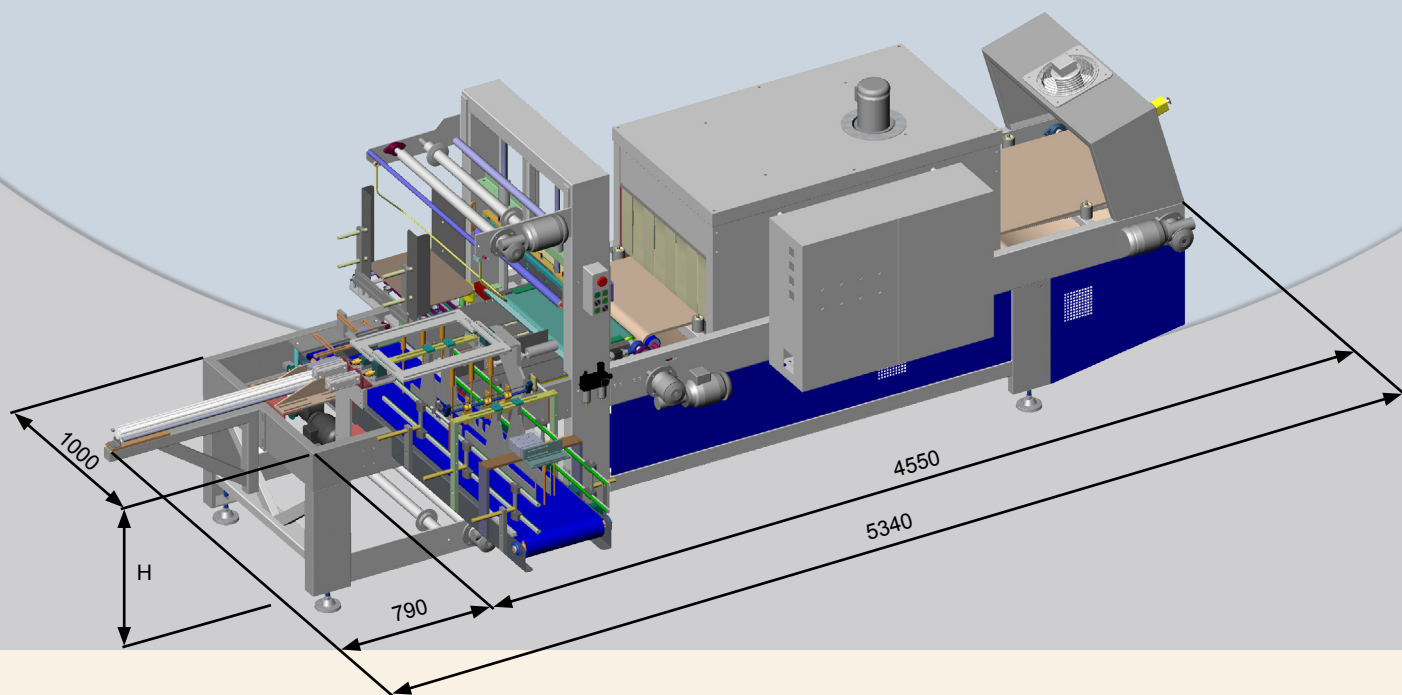

Voltage	220v or 380v
Power	24 Kw
Weight	1100Kg
Air consumption	100 l/min
Air pressure	6 atm
Film thickness	50-100 microns
Maximum production	8-10 p/min, according to product-bundle size



ZORPACK

Polígono Industrial Comarca-2, calle B, N° 20
31191 Ezquiroz (Navarra)
Tel.: +34 948 303 005
Fax: +34 948 302 644
E-mail: zorpack@zorpack.com
www.zorpack.com