

# Shrink Wrappers-Tunnel

Low production rate Only film shrink wrapping machine (8-10 p/min):  
Model ZECA/90.



## OPERATION

The product is received at a 90° angle on the conveyor entrance. The number of lanes on the machine will depend on the line product and format requirements. A pneumatic brake system is used to separate the products. The bottles are wrapped with film inside the shrink wrapping tunnel.

## TECHNICAL FEATURES

Shrink wraps with polyethylene film.

Electronic temperature control in the shrink wrap and welding tunnel.

Manual controls and fully automatic operation.

Double pneumatic brake used to bundle products.

Touch-screen used to adjust or add new formats.

Top quality materials: OMRON automation system, FESTO pneumatic system, TELEMECANIQUE electrical devices.


## PRODUCTS AND MARKET SECTORS

Drinks: Water, fruit juice, oil, dairy products, soft drinks, milkshakes, soda water, energy drinks, alcoholic beverages, liquid yoghurt, beer, vinegar, sauces, etc.



# Shrink Wrappers-Tunnel

Low production rate Only film shrink wrapping machine (8-10 p/min):  
Model ZECA/90.

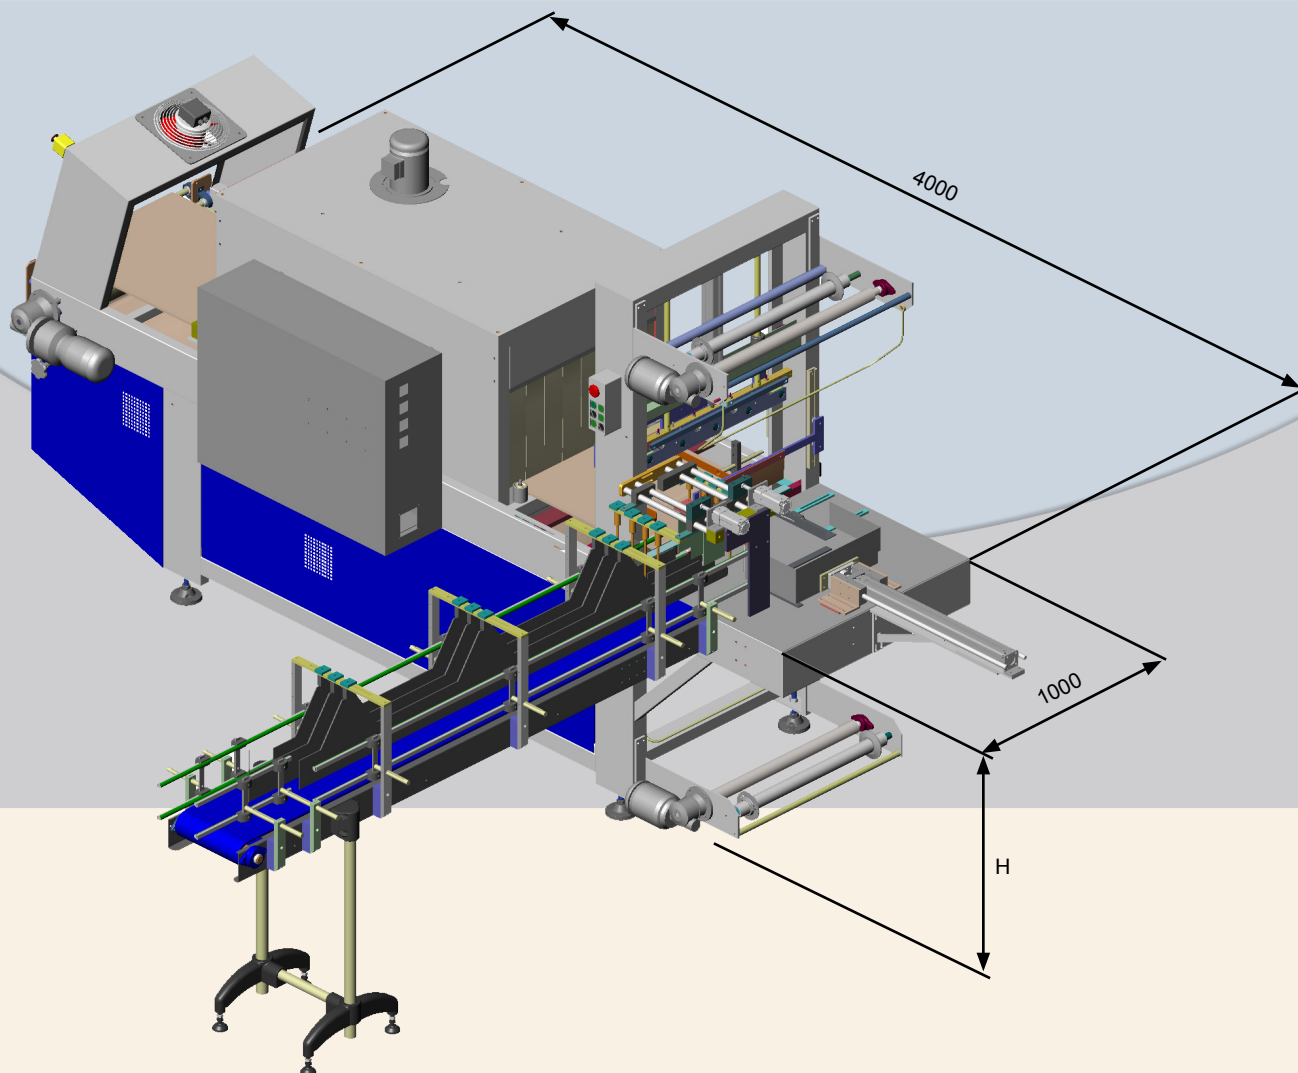

Voltage	220v or 380v
Power	24 Kw
Weight	1100Kg
Air consumption	100 l/min
Air pressure	6 atm
Film thickness	50-100 microns
Maximum production	8-10 p/min, according to product-bundle size



**ZORPACK**

Polígono Industrial Comarca-2, calle B, Nº 20  
31191 Ezquiroz (Navarra)  
Tel.: +34 948 303 005  
Fax: +34 948 302 644  
E-mail: [zorpack@zorpack.com](mailto:zorpack@zorpack.com)  
[www.zorpack.com](http://www.zorpack.com)