

Shrink Wrappers-Tunnel

Medium production rate Only film bottle shrink wrapping machine
(15-17 p/min): model ZECA-F.



OPERATION

The product is received frontally on the conveyor entrance. Cylindrical containers are arranged on lanes according to their direction of travel. A Splitter system will be used to classify the product on different lanes when working with square or rectangle-shaped containers. A pneumatic brake system is used to separate the products in the requested formats. The product is wrapped with film inside the shrink wrapping tunnel.

TECHNICAL FEATURES

Shrink wraps with polyethylene film.
Electronic temperature control in the shrink wrap and welding tunnel.
Manual controls and fully automatic operation.
Double pneumatic brake used to bundle products.
Touch-screen used to adjust or add new formats.
Top quality materials: OMRON automation system, FESTO pneumatic system, TELEMECANIQUE electrical devices.


PRODUCTS AND MARKET SECTORS

Drinks: Water, fruit juice, oil, dairy products, soft drinks, milkshakes, soda water, energy drinks, alcoholic beverages, liquid yoghurt, beer, vinegar, sauces, etc.



Shrink Wrappers-Tunnel

Medium production rate Only film bottle shrink wrapping machine (15-17 p/min): model ZECA-F.

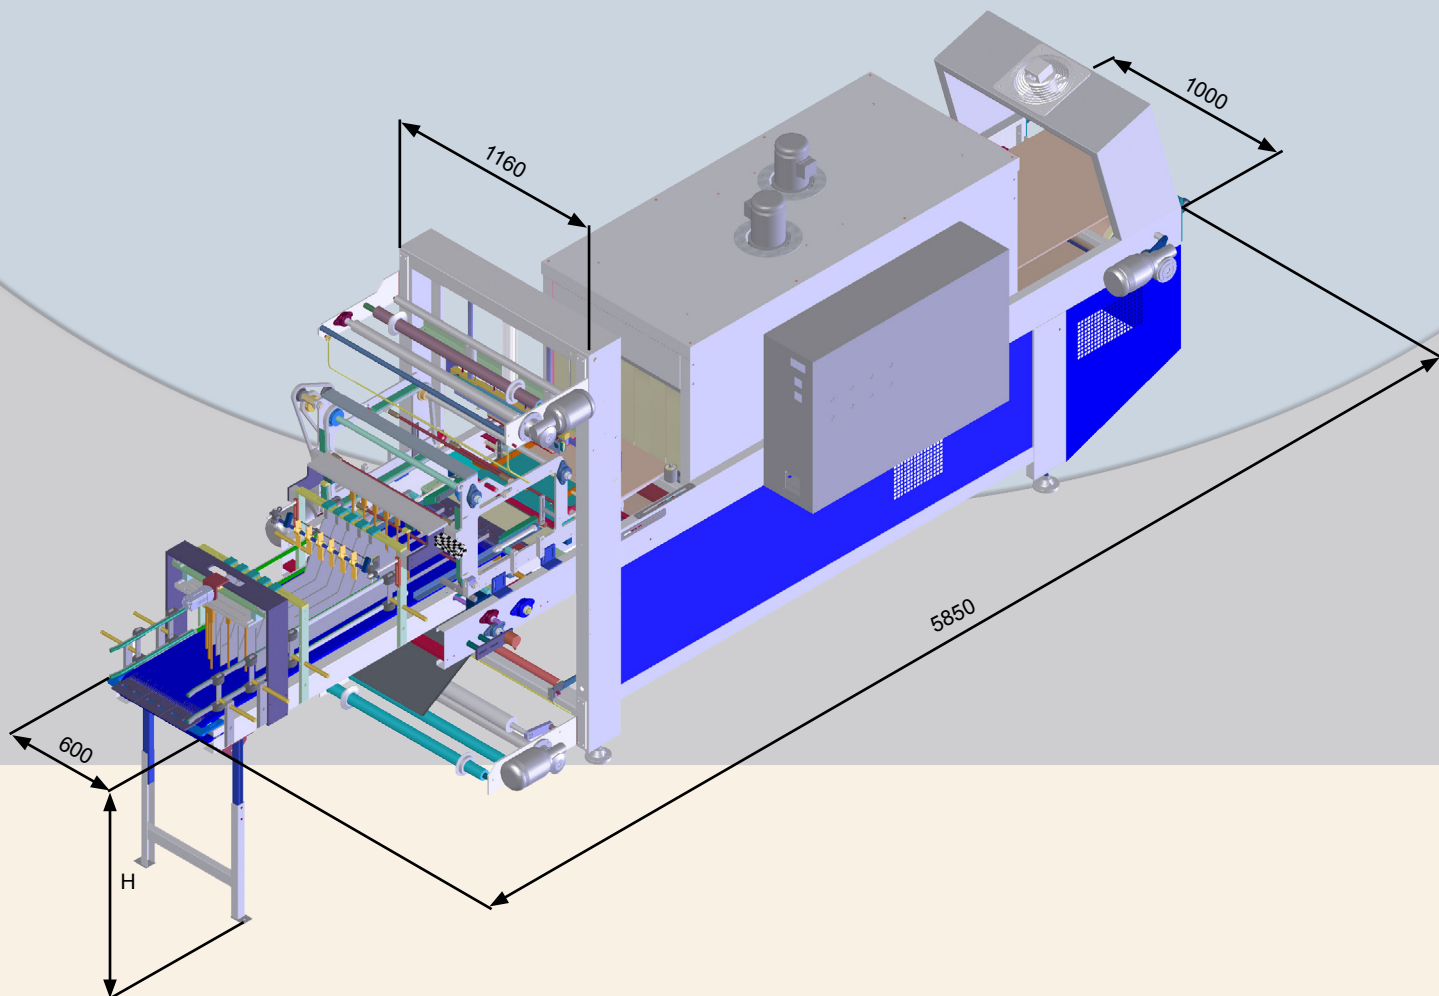

Voltage	220v or 380v
Power	32 Kw
Weight	1300Kg
Air consumption	100 l/min
Air pressure	6 atm
Film thickness	50-100 microns
Maximum production	16-17p/min according to product-bundle size



ZORPACK

Polígono Industrial Comarca-2, calle B, N° 20
31191 Ezquiroz (Navarra)
Tel.: +34 948 303 005
Fax: +34 948 302 644
E-mail: zorpack@zorpack.com
www.zorpack.com